




Shandong Zhaoyue Bearing Co., Ltd.

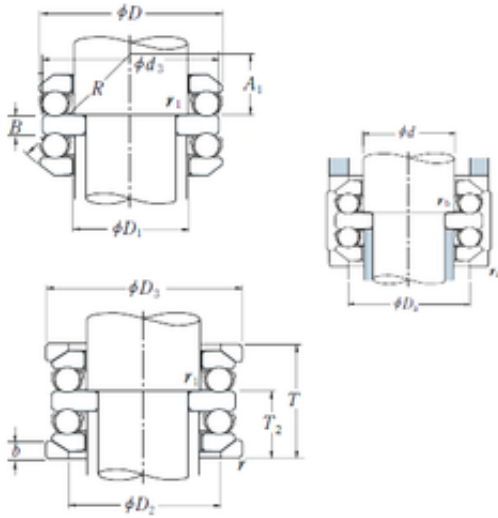

90 mm x 190 mm x 30 mm NSK 54418XU
thrust ball bearings

Bearing No. 54418XU

54418XU Bearing 2D drawings and 3D CAD models

| | |
|-------------------------------|---------------|
| Size | 90x190x157 mm |
| Bore Diameter | 90 mm |
| Outer Diameter | 190 mm |
| Width | 157 mm |
| d | 90 mm |
| d2 | 70 mm |
| D | 190 mm |
| T | 157 mm |
| T2 | 93,5 mm |
| b | 25,5 mm |
| d3 | 189,5 mm |
| r min. | 2,1 mm |
| r1 min. | 1,1 mm |
| A1 | 34,5 mm |
| B | 30 mm |
| D1 | 93 mm |
| D2 | 140 mm |
| D3 | 195 mm |
| R | 140 mm |
| Da max. | 140 mm |
| ra max. | 2 mm |
| rb max. | 1 mm |
| Weight | 22,5 Kg |
| Basic dynamic load rating (C) | 330 kN |
| Basic static load rating (C0) | 825 kN |



Shandong Zhaoyue Bearing Co., Ltd.

| | |
|----------------------------|-----------|
| (Grease) Lubrication Speed | 750 r/min |
|----------------------------|-----------|